



Cubik

INTRODUCTION

Product specifications

01

FRONT COVER

02

CATALOG

03
~
06

MAIN
ADVANTAGES

07

SPECIFICATIONS

08

OPTICAL FIGURE

09

DIMENTION
FIGURE

10

MORE DETAILS

11

CORE
TECHNOLOGY

12

INSTALLATION
INSTRUCTIONS

13

PACKAGE DETAIL

14

APPLICATION

Frosted anti-glare Lampshade

360° lighting range, The light emitting complies with EU standard



MAIN FEATURES

Widely installation

—
easy to install on any ground,fence,table,post and grass.



Movable

—
Movable for other places installation
or work as portable lighting for
camping



IP64 waterproof





New technology enhances user experience

ALS technology to prolong the lighting time >7 rainy days
TCS technology to protect the lights can work normally and safety in very hot and cold temperature

PIR——5m 120°

人来高亮，人走低亮。

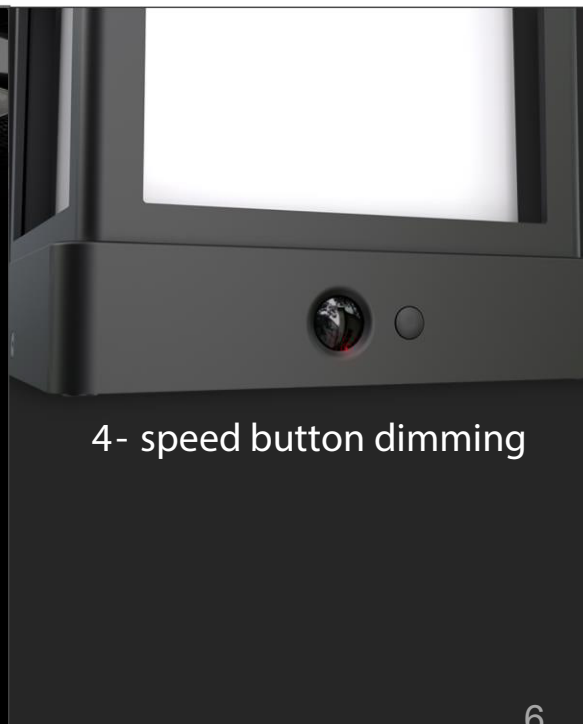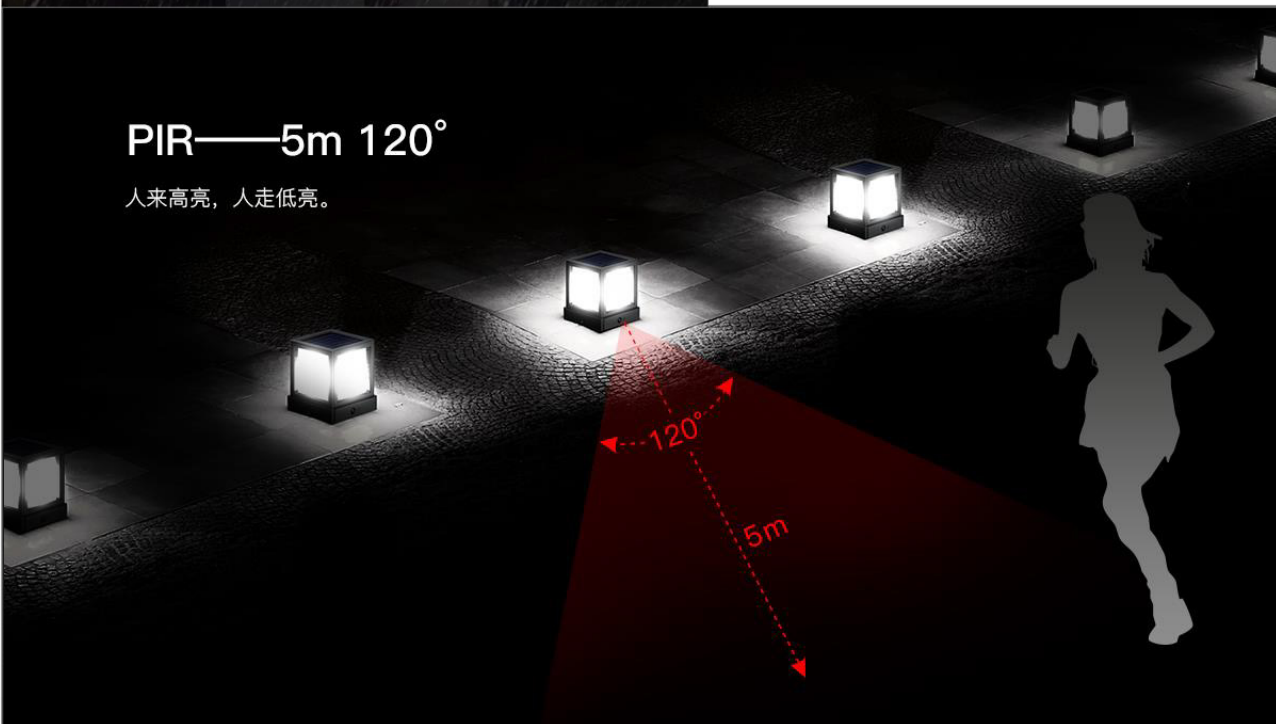

4- speed button dimming


SPECIFICATIONS

Item: Cubik	
Light Brightness	1000LM
Solar panel	
Power	4.86V/1.4W
Li-ion battery	
Capacity	3.7V / 7.4 WH
Charging Temp	0~45°C /-20~+60°C
Charging Time	6.9H
LED	2835 / 20pcs
Color Temp	4000K RA70+
Efficiency	150lm/W
UV LED	-
Performance	
Lighting Time in Rainyday	>10 days
Control Mode	Button Switch, ON/OFF Long Press 1.5s
Lighting Mode	M1: 100lm+PIR (one minute) M2: 0+PIR (one minute) M3: 300lm Timed 6 hours M4: 1000lm 2Hrs
Mode Indication	-
Capacity Indication	-
PIR	120°
Core technology	ALS 2.3
Solar Panel Autoclean	-
IP/IK Class	IP65
Install Height	-
Types of Lighting	120°
Materials	ABS+PS


OPTICAL FIGURE

ESL-54


Road Simulated Diagram

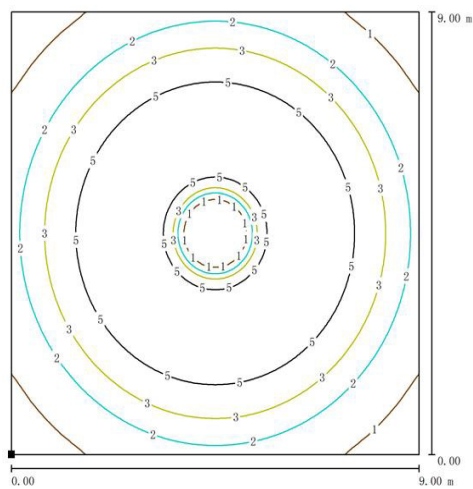

Illumination Curve

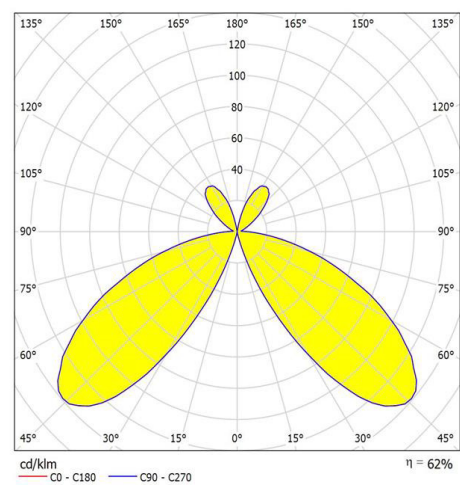


Luminance Distribution

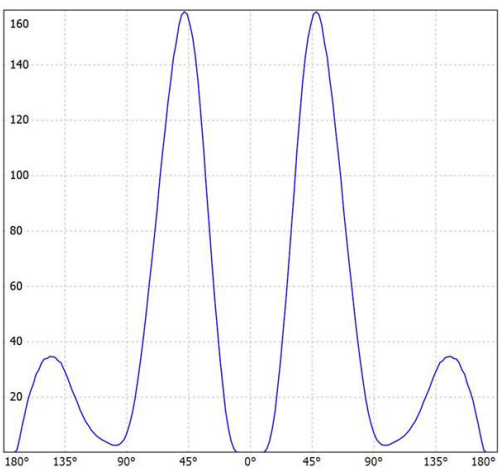


DIMENTION FIGURE

MORE DETAILS

Advantage in every detail

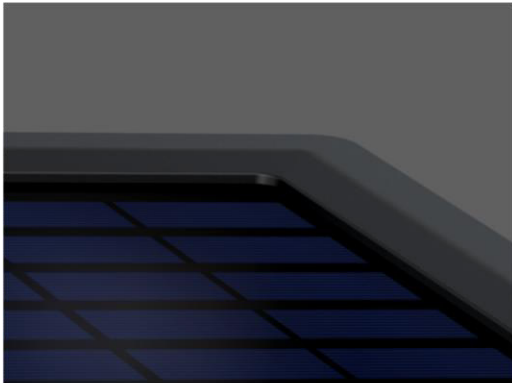


Monocrystalline >21%

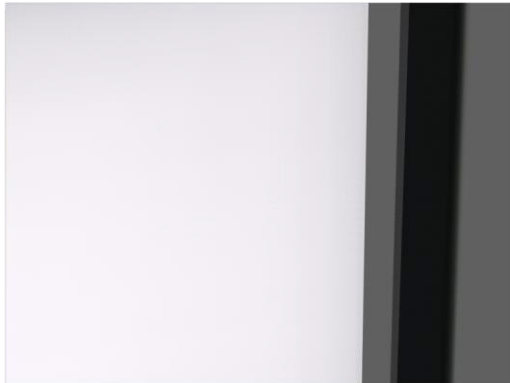

High lumen LEDs 150lm/W



PIR /
Switch

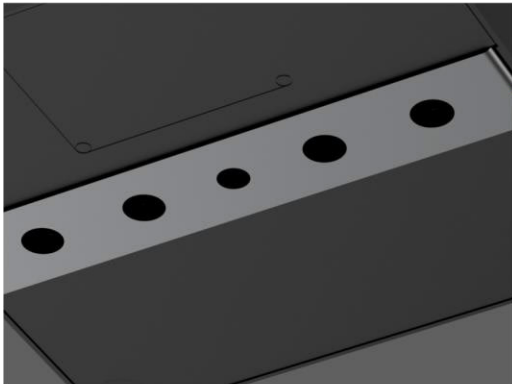

Bracket




Insert Ground




A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.


CORE TECHNOLOGY

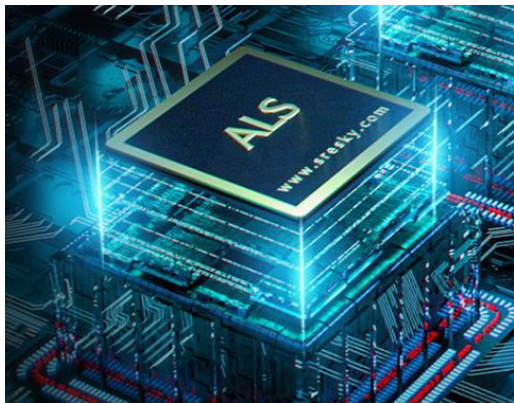

ADVANTAGE OF ALS

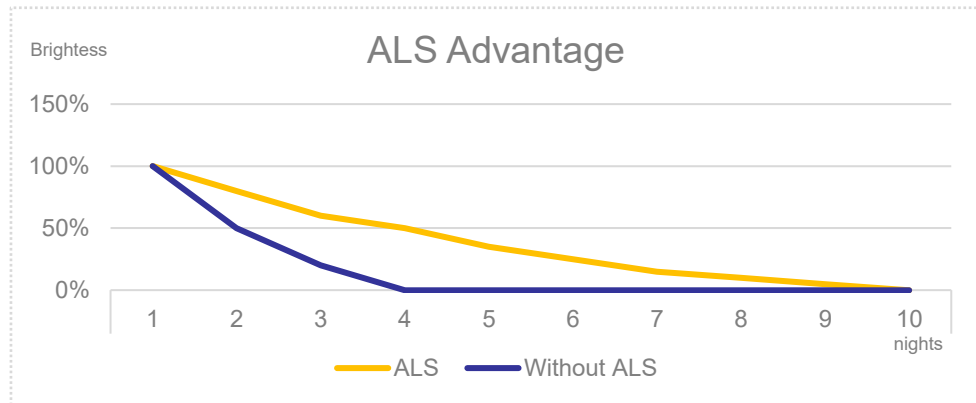


ADVANTAGE OF TCS

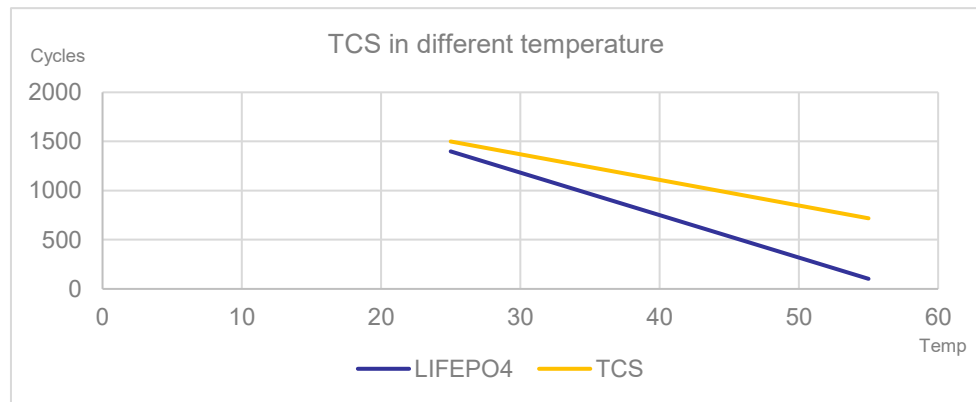


INSTALLATION INSTRUCTIONS



Take the bracket out

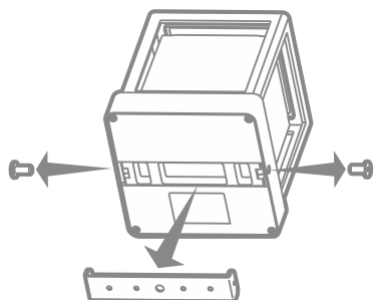

Install it by screws




Install it by stick




Fasten the bracket like this


Fix the lamp to the bracket

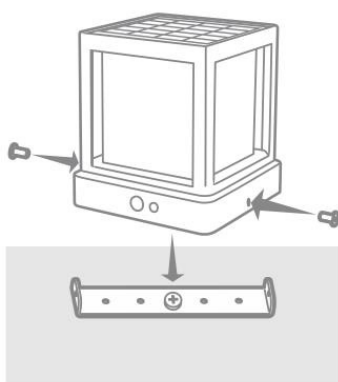

Finished



PACKAGE DETAIL

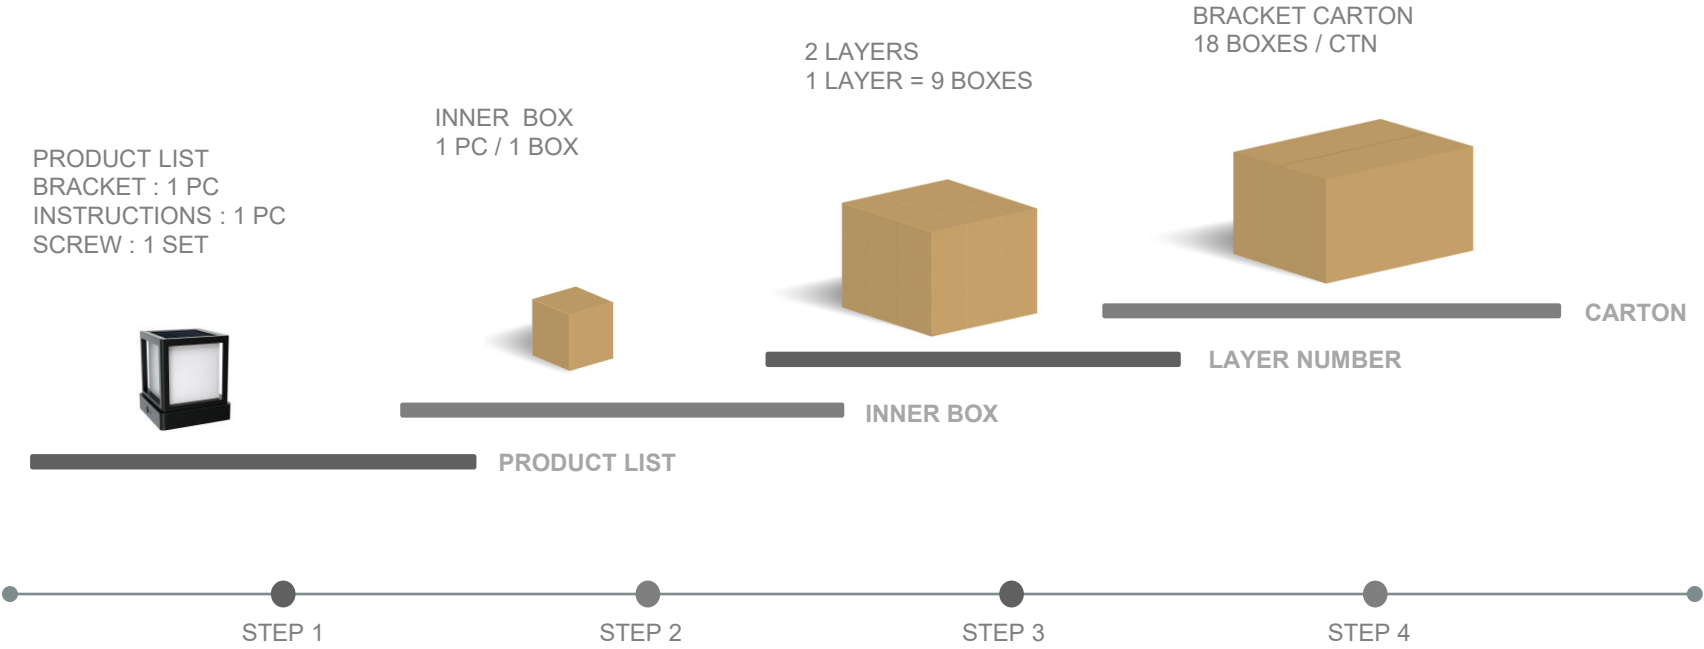

MODEL NO.	PACKING METHOD	PCS/ CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W. (KG)	G.W .(KG)	Carton quantites of 20" GP	Carton quantities of 40" HQ
Cubik	INNER BOX	1	1	1	215x170x188	0.74	0.91	/	/
	CARTON	18	18	1	670x535x405	16.4	17.8	3276	6426

Net weight and gross weight are for reference only

S / O / L / A / R / L / I / G / H / T



EQUIPOS SOLARES